


Single Row Tapered Roller Bearing

30300 Series-30317J2

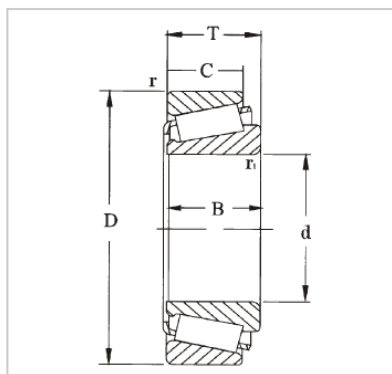

BEARING

WUXI GUANGQIANG BEARING TRADE CO.,LTD

Designacion	30317J2
Dimensiones principales (mm)	
d1	85
D	180
B	44.5
Capacidades de carga básica (KN)	
dyc (Cr)	303
stc (Cor)	365
Pu	40.5
Clasificaciones de velocidad (rpm)	
Clasificaciones de velocidad	2800
Limitar la velocidad	4000
Peso (kilogramos)	4.85
ISO335	
Dimensiones (ABMA)	2GB
Dimensiones [mm]	
D	85
d1	126
B	41
C	34
r1,2 (min)	4
r3,4 (min)	3
a	35
Dimensiones del pilar y del filete [mm]	
da (máx.)	107
db (min)	99
Da (min)	156
Da (máx.)	166
Db (min)	167
Ca (min)	6
Cb (min)	10.5
ra (máximo)	3
rb (máximo)	2.5
Valor	
mi	0.35
Y	1.7
yo	0.9

GQZ high quality 30300 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com