


Single Row Tapered Roller Bearing

31300 Series-31328XJ2

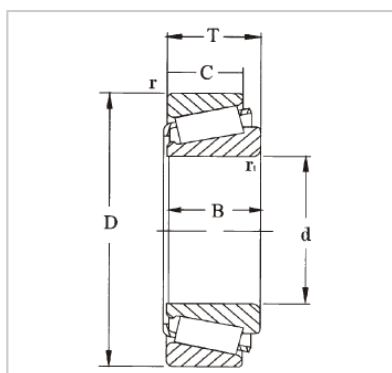

WUXI GUANGQIANG BEARING TRADE CO.,LTD

Designacion	31328XJ2
Dimensiones principales (mm)	
d1	140
D	300
B	77
Capacidades de carga básica (KN)	
dyc (Cr)	693
stc (Cor)	900
Pu	88
Clasificaciones de velocidad (rpm)	
Clasificaciones de velocidad	1500
Limitar la velocidad	2200
Peso (kilogramos)	24.5
ISO335	
Dimensiones (ABMA)	7GB
Dimensiones [mm]	
D	140
d1	219
B	70
C	47
r1,2 (min)	5
r3,4 (min)	4
a	90
Dimensiones del pilar y del filete [mm]	
da (máx.)	169
db (min)	160
Da (min)	235
Da (máx.)	283
Db (min)	280
Ca (min)	9
Cb (min)	30
ra (máximo)	4
rb (máximo)	3
Valor	
mi	0.83
Y	0.72
yo	0.4

GQZ high quality 31300 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com