


## Single Row Tapered Roller Bearing

33100 Series-33117/Q



WUXI GUANGQIANG BEARING TRADE CO.,LTD

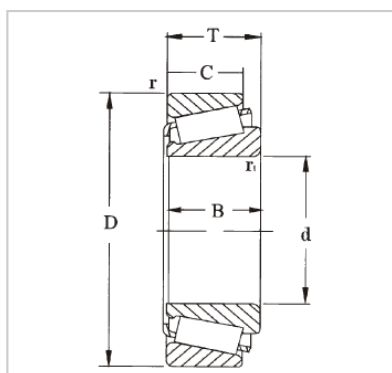

|                                         |                |
|-----------------------------------------|----------------|
| Designacion                             | <b>33117/Q</b> |
| Dimensiones principales (mm)            |                |
| d1                                      | 85             |
| D                                       | 140            |
| B                                       | 41             |
| Capacidades de carga básica (KN)        |                |
| dyc (Cr)                                | 220            |
| stc (Cor)                               | 340            |
| Pu                                      | 38             |
| Clasificaciones de velocidad (rpm)      |                |
| Clasificaciones de velocidad            | 3400           |
| Limitar la velocidad                    | 4500           |
| Peso (kilogramos)                       | 2.45           |
| ISO335                                  |                |
| Dimensiones (ABMA)                      | 3DE            |
| Dimensiones [mm]                        |                |
| D                                       | 85             |
| d1                                      | 112            |
| B                                       | 41             |
| C                                       | 32             |
| r1,2 (min)                              | 2.5            |
| r3,4 (min)                              | 2              |
| a                                       | 32             |
| Dimensiones del pilar y del filete [mm] |                |
| da (máx.)                               | 95             |
| db (min)                                | 95             |
| Da (min)                                | 122            |
| Da (máx.)                               | 130            |
| Db (min)                                | 135            |
| Ca (min)                                | <b>7</b>       |
| Cb (min)                                | 9              |
| ra (máximo)                             | 2              |
| rb (máximo)                             | 2              |
| Valor                                   |                |
| mi                                      | 0.4            |
| Y                                       | 1.5            |
| yo                                      | 0.8            |

## GQZ high quality 33100 Series Single Row Tapered Roller Bearing

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Wuxi Guangqiang Bearing Trade Co.,Ltd-Tel:86-510-82601571-Email:gq@gqbearing.com,shary@gqbearing.com-http://www.bearing-asia.com